

壓入型鋼珠滾輪 (樹脂主體)




LZ-410

Press-in type steel ball roller (resin body)

商品介紹 Product description

易安裝 · 好調整 · 用於定位及鎖定功能。

Easy to install, easy to adjust, for positioning and locking functions.

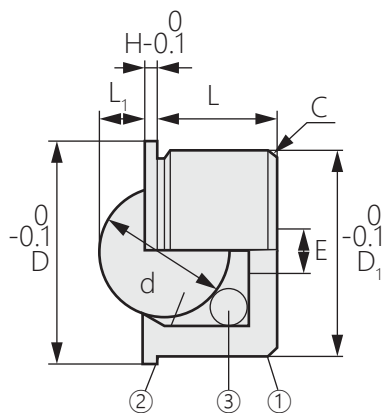

| 商品型號 | 材質 | | |
|----------|------|---------|--------|
| | 主體 | 主球 | 副球 |
| LZ-410-1 | 聚縮醛 | SUS440C | HRC55~ |
| LZ-410-2 | PEEK | | |

| 商品型號 | | D1 | D | L | H | L1 | | d | | E | C | 耐負載 (N) | |
|------------|------------|----|----|------|---|----------|----------|----------|----------|-----|-----|----------|----------|
| | | | | | | LZ-410-1 | LZ-410-2 | LZ-410-1 | LZ-410-2 | | | LZ-410-1 | LZ-410-2 |
| LZ-410-1-1 | LZ-410-2-1 | 7 | 9 | 4 | 1 | 1.5 | - | 4.76 | - | 1.5 | 0.8 | 2 | - |
| LZ-410-1-2 | LZ-410-2-2 | 9 | 11 | 5 | | 1.7 | 2 | 5.56 | 6.35 | 2.5 | | 4 | 5 |
| LZ-410-1-3 | LZ-410-2-3 | 11 | 13 | 7 | | - | 2.5 | - | 7.94 | 3 | | - | 6 |
| LZ-410-1-4 | LZ-410-2-4 | 13 | 15 | 8 | | 2.8 | 3 | 8.73 | 9.53 | 3.5 | | 7 | 8 |
| LZ-410-1-5 | LZ-410-2-5 | 15 | 17 | - | | 3.5 | | 10.32 | - | - | | 11 | - |
| LZ-410-1-6 | LZ-410-2-6 | 20 | 22 | 11.5 | | 5.2 | | 15.87 | - | 5.3 | | 14 | |
| LZ-410-1-7 | LZ-410-2-7 | 24 | 26 | 15 | | 6.6 | 19.05 | - | 6.4 | 21 | | | |