

商品介紹 Product description



1. 利用表面貼裝技術焊接到印刷電路板材料上。
2. 佔用空間較小，適合空間有限應用。
3. 熱處理鋼製螺釘強度更高。

1. Solder to the printed circuit board material using surface mount technology.
2. Small footprint, suitable for space-constrained applications.
3. Heat treated steel screws are stronger.




- 材質：導套-鋼、把手-鋁、螺釘-硬化碳鋼
內部彈簧-300系列不鏽鋼鈍化、插塞:硅橡膠
- 表面處理：導套-鍍錫、把手-本色
螺釘-鍍鋅/鉻酸鹽/加保護層、內部彈簧-鈍化




- Material: Guide bush-steel, handle-aluminum, screw-hardened carbon steel, inner spring-300 series stainless steel passivated, plug: silicone rubber
- Finish: Guide bush-tin plated, handle-natural color, screw-zinc plated/chromate/protective layer, inner spring - passivated

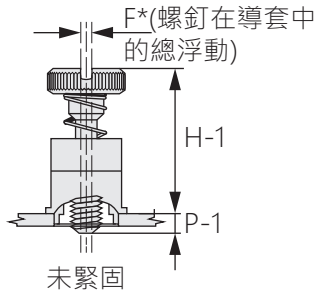

NO.2十字頭/
一字頭組合 T15 TORX®梅花頭/
一字頭組合

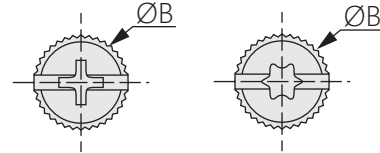

頭型樣式

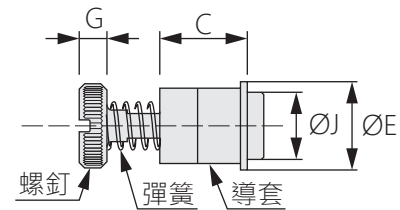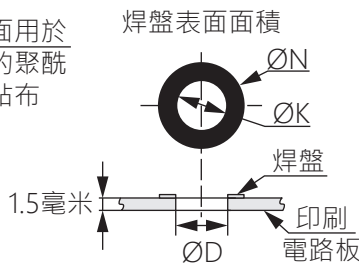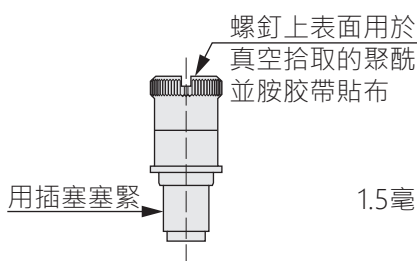

商品型號		螺紋	H-1	H-2	P-1	P-2	ØB 滾花頭	ØB 光滑頭	ØJ	ØE	C	G	F*	ØK	ØN	ØD
十字頭 / 一字頭	TORX® / 一字頭															
LZ-96-SM-3311-K-R	LZ-96-SM-3411-K-R	M3*0.5	14	9.6	0.8	5.3	7	6.8	5.5	7.6	7	2.5	0.5	5.6	8.6	5.6+0.08/-0
LZ-96-SM-3321-K-R	LZ-96-SM-3421-K-R				2.3	6.8										
LZ-96-SM-1311-K-R	LZ-96-SM-1411-K-R				0.8	5.3										
LZ-96-SM-1321-K-R	LZ-96-SM-1421-K-R	4-40			2.3	6.8										
LZ-96-SM-2311-K-R	LZ-96-SM-2411-K-R				0.7	5.8										
LZ-96-SM-2321-K-R	LZ-96-SM-2421-K-R	6-32	15.7	10.7	2.2	7.4	7.9	7.6	6.2	8.1	8.1		0.8	6.4	10.2	6.4+0.08/-0

商品型號		螺紋	H-1	H-2	P-1	P-2	ØB 滾花頭	ØB 光滑頭	ØJ	ØE	C	G	F*	ØK	ØN	ØD
十字頭 / 一字頭	TORX® / 一字頭															
LZ-96-SM-3311-N-R	LZ-96-SM-3411-N-R	M3*0.5	14	9.6	0.8	5.3	7	6.8	5.5	7.6	7	2.5	0.5	5.6	8.6	5.6+0.08/-0
LZ-96-SM-3321-N-R	LZ-96-SM-3421-N-R				2.3	6.8										
LZ-96-SM-1311-N-R	LZ-96-SM-1411-N-R				0.8	5.3										
LZ-96-SM-1321-N-R	LZ-96-SM-1421-N-R	4-40			2.3	6.8										
LZ-96-SM-2311-N-R	LZ-96-SM-2411-N-R				0.7	5.8										
LZ-96-SM-2321-N-R	LZ-96-SM-2421-N-R	6-32	15.7	10.7	2.2	7.4	7.9	7.6	6.2	8.1	8.1		0.8	6.4	10.2	6.4+0.08/-0